

# REVERSE TRANSMITTER


SPN-RVS



A converter is in use of providing the isolation and reverse DC signal output proportional to the input signal.

- Matching a manipulating signal with the valve action.
- 3 or 4 outputs are available from 1 input.
- Contains overvoltage protection circuit.
- Transformer isolation type.

## MODEL & SUFFIX CODE SELECTION

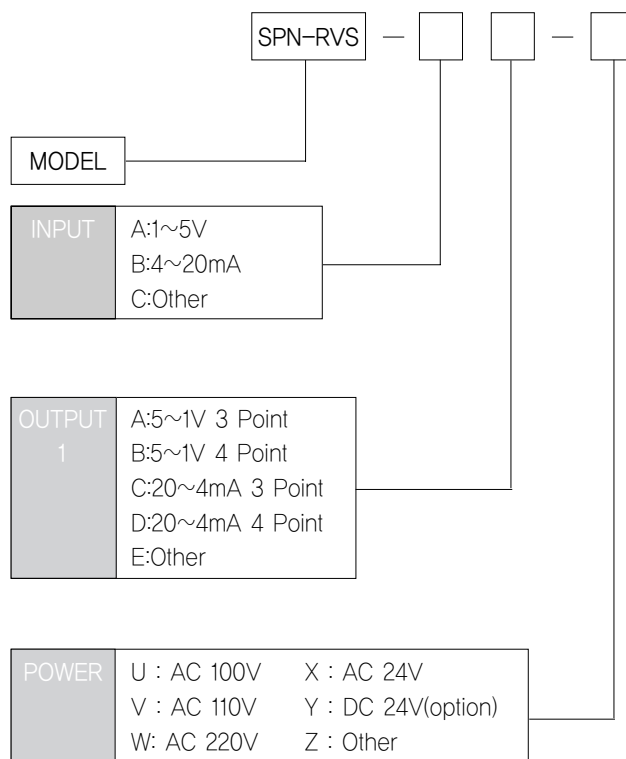

## GENERAL SPECIFICATIONS

Isolation/Type	Input to output to power/Transformer isolation type		
Power Supply	AC rating $\pm 10\%$ , approx. 7VA DC rating $\pm 10\%$ , (ripple 10%)200mA		
Accuracy	$\pm 0.15\%$ (Max)		
Temp Coefficient	$\pm 0.015\%$ / $^{\circ}\text{C}$ ( $\pm 0.008\%$ / $^{\circ}\text{F}$ )		
Linearity	$\pm 0.2\%$ F.S		
Insulation Resistance	Greater than 100M $\Omega$ with DC 500V		
Dielectric Strength	Input - Power	AC 2500V  AC 1000V	1 minute
	Input - Output		
	Output 1 - Output 2		
	GND - Power		
Front Adjustments	Zero and Span $\pm 5\%$		
Overrange Output	approx. -10% ~ 110% at DC 1~5V		
Response Time	$\leq 0.5$ sec (0~90%)		
Operating Temperature/Humidity	-20~60 $^{\circ}\text{C}$ / 90%(N.C)		
Storage Temperature/Humidity	-20~80 $^{\circ}\text{C}$ / 95%(N.C)		
Dimensions	W81xH129xD138(mm)		
Case Material	Aluminum		
Weight	about 980g		
Mounting	Wall mounting		

# SIGNAL CONVERTER SPN-RVS

## INPUT & OUTPUT SPECIFICATIONS

### Input Impedance

Input	Impedance
4~20mA	250Ω
1~5V	1MΩ (Min)

### Output Load Resistance

Output	Out-1	Out-2	Out-3	Out-4	Remark
20 ~ 4mA	460Ω	460Ω	460Ω	460Ω	(Max)
20 ~ 4mA	460Ω	460Ω	460Ω	460Ω	(Max)
10 ~ 2mA	950Ω	950Ω	950Ω	950Ω	(Max)
5 ~ 1V	5000Ω	5000Ω	5000Ω <td 5000Ω	(Min)	
1 ~ 0V	1000Ω	1000Ω	1000Ω	1000Ω	(Min)

## BLOCK DIAGRAM

